

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)


PCT

(10) International Publication Number
WO 03/058995 A1

- (51) International Patent Classification⁷: H04Q 7/38, 7/22 (74) Agent: OULUN PATENTTITOIMISTO BERGGREN OY AB; Lentokatu 2, FIN-90460 Oulunsalo (FI).
- (21) International Application Number: PCT/FI03/00013
- (22) International Filing Date: 9 January 2003 (09.01.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20020048 10 January 2002 (10.01.2002) FI
- (71) Applicant (*for all designated States except US*): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventors; and (75) Inventors/Applicants (*for US only*): SÉBIRE, Guillaume [FR/FI]; Munkkiniemen Puistotie 10 B 29, FIN-00330 Helsinki (FI). VAITTINEN, Rami [FI/FI]; Elementinpolku 17 A 10, FIN-33720 Tampere (FI).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD FOR BROADCASTING OF A POSSIBILITY TO USE 3G MOBILE COMMUNICATION NETWORK

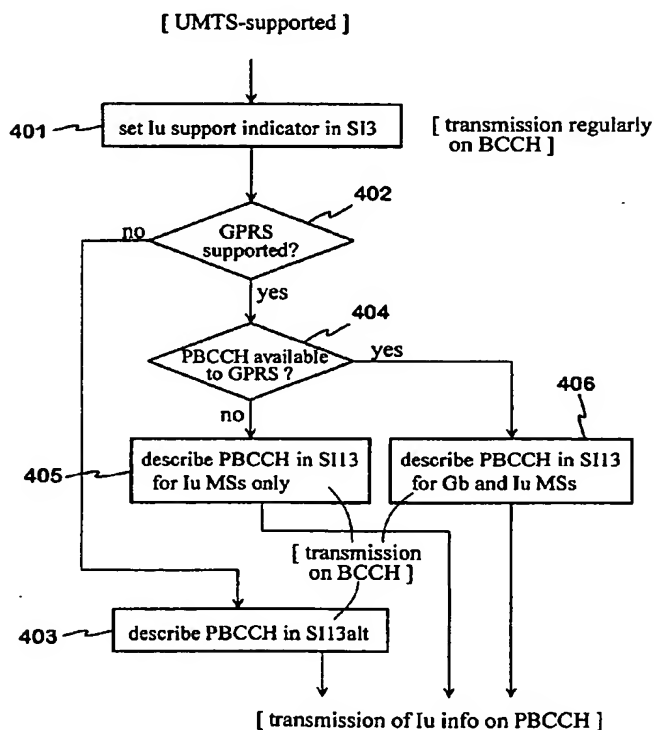

(57) Abstract: The invention relates to a method with which cellular network terminals are informed of a possibility to use services of 3G mobile communication networks in a radio access network. A spare bit of the broadcast message SI3 of GSM system is defined as a bit indicating, whether the current GERAN cell supports UMTS service through the Iu interface or not. In a favourable case, another SI message is broadcast including a description of the PBCCH where Iu information for mobile stations is placed. Should the GERAN support also the GPRS service, said another message is SI13, and if the GERAN does not support the GPRS service, said another message is SI13alt. This message can only be employed by UMTS capable mobile stations. By means of the invention the information presumed by the use of the UMTS network can quickly be acquired by a mobile station, which for example arrives in a GERAN cell.

WO 03/058995 A1

WO 03/058995 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for broadcasting of a possibility to use 3G mobile communication network

The invention relates to a method with which cellular network terminals are informed of a possibility to use services of a 3G mobile communication networks in a radio access network.

- So-called third generation mobile communication network means an extension of the present mobile communication networks, which increases and improves services of the network. The abbreviation UMTS (Universal Mobile Telecommunications System) is often used of third generation or 3G mobile communication network.
- Figure 1 shows a simplified example of the structure of a GSM (Global System for Mobile communications) type mobile communication network. The network comprises a core network CN and radio access networks RAN. Core network includes traditional GSM centres and normally also other service nodes. Figure 1 shows one traditional GSM centre MSC (Mobile Switching Centre) and one SGSN (Serving GPRS Support Node) handling packet switched information transfer, in which GPRS means corresponding service (General Packet Radio Service). Furthermore, in the core network of the example can be seen two 3G service nodes, 3GNs and 3GNp. Radio access networks are located between the core network and network terminals. A radio access network includes one or more base transceiver stations BTS and a base station controller BSC. Each base transceiver station has a fixed connection to the base station controller of the area in question, which BSC in turn has a fixed connection to at least one core network node. Connection to a conventional GSM centre corresponds to so-called A interface service mode, connection to a SGSN node corresponds to so-called Gb interface service mode (same as GPRS) and connection to a 3G node corresponds to so-called Iu interface service mode. This can be cs type (circuit switched), or ps type (packet switched). Radio access network GERAN (GSM/EDGE RAN), EDGE = Enhanced Data rates for Global Evolution, in figure 1 has said four connections to the core network. Naturally a GERAN does not necessarily have all types of interfaces.
- In the traffic area, or cell of a base transceiver station BTS1 of the network GERAN is also shown one terminal, i.e. mobile station MS. A "GERAN cell" means in this description that kind of cell, which is under control of a GERAN. Moreover, Figure 1 shows another radio access network RAN2. This can be e.g. GERAN or UTRAN (UMTS Terrestrial RAN).

Each frequency division channel of a digital mobile communication system includes, in addition to traffic channels, a group of control channels realized by means of time division. To control channels belong e.g. broadcast control channels (BCCH in the GSM system) intended to be traced by all mobile stations in the area, common control channels used jointly by certain mobile stations, and dedicated control channels and associated control channels used by each mobile station individually during speech or data connection. In a cell supporting GPRS, GPRS-specific control channels may be used in addition to the control channels required in a basic GSM system, namely PBCCH (Packet Broadcast Control Channel) and PCCCH (Packet
5 Common Control Channel), or P channels. A GERAN supporting Iu requires these P channels in the cells where UMTS service through the Iu interface is provided irrespective whether this GERAN supports GPRS.

Control information of different layers is transferred in channels in messages having defined format. The present invention relates to the operation of layer 3, i.e. network layer as regards radio access networks, in other words to controlling of so-called radio resources RR. There are several groups of RR messages, among which
15 are system level broadcast messages, or SI (System Information) messages. These are aimed at broadcasting information that is needed for the mobile station to operate properly in the system in question.

Message SI3 is sent at relatively short intervals on the BCCH. It has room e.g. for GPRS indicator, which informs mobile stations whether GPRS service is supported in the cell in question or not. Further information concerning GPRS service in this cell is sent in a message SI13 to the BCCH of this cell. In cells that support GPRS service could in principle also Iu support-related information be sent on the BCCH
25 for example in messages SI13. In a GERAN cell that supports UMTS service but not GPRS service this possibility does not exist, because SI13 messages are then not sent. From conference publication "Service Modes and System Information" (November 26-30, 2001), Ericsson Ltd, is known a proposal for adding a two-bit field in the part of the message SI3. The field would inform mobile stations about the Iu service mode. However, there is only one spare bit left in the SI3 Rest Octets at present. There is no room for the required information in other messages sent regularly to the BCCH.
30

An object of the invention is to remove said disadvantage associated with the prior art. The method according to the invention is characterized by what is specified in the independent claim 1. Some preferred embodiments of the invention are specified in the other claims.
35

The basic idea of the invention is as follows: A spare bit of the broadcast message SI3 of GSM system is defined as a bit indicating, whether the current GERAN cell supports UMTS service through the Iu interface or not. In a favourable case, another SI message is broadcast including a description of the PBCCH where Iu information
5 for mobile stations is placed. Should the GERAN support also the GPRS service, said another message is SI13, and if the GERAN does not support the GPRS service, said another message is SI13alt. This message can only be employed by UMTS capable mobile stations.

10 An advantage of the invention is that the information presumed by the use of the UMTS network can quickly be acquired by a mobile station, which for example arrives in a GERAN cell. The speed is based on the use of a SI3 message sent in the BCCH.

Of course the advantage only relates to mobile stations being capable of using UMTS service through GERAN Iu interface. "Iu mobile station" in this description
15 and patent claims means such a mobile station. Correspondingly, "Gb mobile station" means a mobile station being capable of using GPRS service through GERAN Gb interface.

In the following the invention is explained in more detail. The description refers to the attached drawings, in which

- 20 Fig. 1 shows a basic structure of a GSM type mobile communication network,
Fig. 2 shows a prior art rest part of SI3 message,
Fig. 3 shows a rest part of SI3 message according to the invention, and
Fig. 4 shows in a flow chart an example of the method according to the invention.
- 25 Figure 1 is already described in the introduction of the description.

In Figure 2 there is a diagram of the rest part of the SI3 message having four octets. The form of the rest octets is valid at present (Release 4 of 3GPP). In the diagram there are marked with grey those fields, which are mostly linked with the handover of servicing base transceiver station during a speech connection, and are non-
30 substantial from the point of view of the present invention. Bit number 25 (gpi) in rest octets indicates the presence of the GPRS indicator and informs, whether the current GERAN cell supports the GPRS service or not. If the bit gpi is "low", GPRS

is not supported and the GPRS indicator is not present. If the bit *gpi* is "high, GPRS is supported, and the GPRS indicator is present. The GPRS indicator consists of the fields "RA COLOUR" and "SI13 POSITION" (bits number 26-29 in the octets) to arrange the packet switched service. From the point of view of the invention is important the last bit *x*, which is a spare bit.

With a syntax used in standards the contents of the SI3 rest octets is as follows:

```

<SI3 Rest Octet> ::= <Optional selection parameters>
    <Optional Power offset>
    <System Information 2ter Indicator>
10    <Early Classmark Sending Control>
    <Scheduling if and where>
    { L | H <GPRS Indicator> }
    <3G Early Classmark Sending Restriction>
    { L | H <SI2quater Indicator : <SI2quater Indicator struct > > }
15    <spare padding>;

<Optional Selection Parameters> ::= L | H <Selection Parameters>;
<Selection Parameters> ::=
    <CBQ: bit (1)>
    <CELL_RESELECT_OFFSET: bit (6)>
20    <TEMPORARY_OFFSET: bit (3)>
    <PENALTY_TIME: bit (5)>;

<Power Offset indicator> ::= L | H;
    <Power Offset: bit (2)>;

<System Information 2ter Indicator> ::= L | H;
25 <Early Classmark Sending Control> ::= L | H;
    <Scheduling if and where> ::= L | H <WHERE: bit (3)>;
    <GPRS Indicator> ::= L | H;
        <RA COLOUR : bit (3) >
        <SI13 POSITION : bit >;

30 <3G Early Classmark Sending Restriction> ::=
    L -- Neither UTRAN nor cdma2000 classmark change message shall be sent with
    the Early classmark sending
    H ; -- The sending of UTRAN and cdma2000 classmark Sending messages is controlled by the Early Classmark Sending Control parameter

35 <SI2quater Indicator struct > ::=
    <SI2quater_POSITION : bit > ;

```

Figure 3 shows an example of the rest part of SI3 message according to the invention. When compared with Figure 2, it is seen that previously unused bit *x* is now an *lu* support indicator *usi*. The state "low" of this bit indicates that the current cell, or

the cell in which the message is sent, of a GERAN does not support UMTS service through an Iu interface between this GERAN and 3G type centre of a core network. The state "low" of the Iu support indicator can as well be used in order to prevent any UMTS operation through Iu interface in the current cell, whereupon this cell is

5 barred against UMTS operation. An Iu only mobile station shall not (re)select such a cell, and therefore the cell is barred against Iu only mobile stations. The state "high" of the Iu support indicator bit means that the current cell of a GERAN supports UMTS service through the Iu interface. (Also) in this case said cell can be such that it either supports or does not support the GPRS service. In the example of

10 Figure 3 the cell does not support the GPRS service, for which reason the GPRS indicator is not present. This means that the room of the GPRS indicator, i.e. the room of fields "RA COLOUR" and "SI13 POSITION" in Figure 2, is released. The released room is used to place the Iu indicator field. This field is formed, in the example of Figure 3, of a bit "SI13alt POSITION" in the spot 30 of the rest octets. The existence

15 of the Iu indicator field means that a SI13alt message is sent including a description of the PBCCH. The state of bit "SI13alt POSITION" indicates, whether the SI13alt message is transferred in a normal BCCH or in BCCH extended by its capacity. When a cell of a GERAN supports the GPRS service, too, there is no room for the Iu indicator field. 3G mobile station can then look for the description of the PBCCH

20 in the SI13 message transferred on the BCCH, on grounds that the GPRS indicator bit is present.

Corresponding the changes in accordance with the invention the line

"<spare padding>," in the listing above is replaced by a line

<Iu support indicator>; -- *Iu support indication* ,

25 and to the end of the listing are added lines

<Iu support indicator> :: = L|H|H <Iu indicator>;

<Iu indicator> :: = <SI13alt POSITION: bit >;

where "SI13alt POSITION" defines the minimum schedule for where the SI13alt message is sent as:

30 0 SI13alt message is sent on the channel BCCH normal
 1 SI13alt message is sent on the channel BCCH extended.

Fig. 4 shows as a flow chart an example of the method for indicating a possibility to use 3G mobile communication network according to the invention. The starting

point then is that a cell of the radio access network in question supports the UMTS service, concerning at least a part of the cells being under control of the radio access network. In step 401 is formed a message SI3 so that the Iu support indicator bit is included in the message. The SI3 message is sent at relatively short intervals on the BCCH. In step 402 it is checked whether said cell supports the GPRS service. If not, the PBCCH is described, according to step 403, in a SI13alt message so that Iu mobile stations will be able to get Iu information from PBCCH. SI13alt message is sent on the BCCH, and it is illegible to other than Iu mobile stations; they ignore the message. If said cell supports the GPRS service, it is checked in the SI13 message whether PBCCH and PCCCH are available to GPRS (step 404). If not, the PBCCH is described for Iu mobile stations only, according to step 405, in a SI13 message. That message is sent on the BCCH, and its PBCCH description part is illegible to other than Iu mobile stations. If the PBCCH is available to GPRS, the PBCCH is described (step 406) in a SI13 message, sent on the BCCH, for Iu mobile stations and for GPRS mobile stations. The same PBCCH channel is then used to transfer both GPRS and Iu information.

In all cases the Iu information is sent on the PBCCH.

An Iu mobile station, camped on a GERAN cell, which offers UMTS service, operates in a way corresponding to the above-explained:

- 20 - If in a SI3 message received from the BCCH, the mobile station detects the GPRS indicator being not present and if it finds the Iu support indicator bit being in state "high", it shall assume that GPRS is not supported and Iu is supported in the cell. Then it shall read the Iu indicator where it finds the field "SI13alt POSITION". The mobile station will then read the SI13alt message from the BCCH, normal or extended depending on the SI13alt position, and decode the description of the PBCCH therein. It will then be able to read the Iu information from the PBCCH.
- 25 - If in a SI3 message received from the BCCH, the mobile station detects the GPRS indicator being present and if it finds the Iu support indicator bit being in state "high", it shall assume that both GPRS and Iu are supported in the cell, and that no Iu indicator is included in the SI3 message. The mobile station will then read the SI13 message from the BCCH, normal or extended depending on the SI13 position in the GPRS indicator, and decode the description of the PBCCH therein. It will then be able to read the Iu information from the PBCCH.
- 30 - If the mobile station finds the Iu support indicator bit being in state "low" in a SI3 message received from the BCCH, it shall assume Iu is not supported in the cell and
- 35

shall operate as a 1G or 2G mobile station, which can use services provided through A and Gb interfaces.

Above it was described the principle of the invention. The invention is not limited just to the described matter. It can be applied in different ways within the scope de-
5 fined by the independent claim.

Claims

1. A method for broadcasting of a possibility to use UMTS service in a cell under control of a GERAN type radio access network having an Iu interface to a 3G core network, a radio resource management system of the radio access network comprising a first and a second message, which messages are transferred on a first broadcast control channel in said cell, and which first message has at least one spare bit,
5 **characterized** in that said spare bit is used (401) for indicating, whether said cell supports an UMTS service, and in a favourable case
- a second broadcast control channel is described (403; 405; 406) in the second message to at least Iu mobile stations, and
10 - UMTS service information for Iu mobile stations is broadcast on the second broadcast control channel.
2. The method of claim 1, **characterized** in that said first message is System Information 3 of the GSM system.
- 15 3. The method of claim 1, **characterized** in that said first channel is BCCH of the GSM system and said second channel is PBCCH of the GSM system.
4. The method of claim 1, wherein the radio access network supports the UMTS-service and does not support a GPRS service, **characterized** in that said first message further comprises an Iu indicator field, and said second message is System Information 13alt of the GSM system and is legible only to Iu mobile stations.
20
5. The method of claim 1, wherein the radio access network supports both the UMTS service and a GPRS service, **characterized** in that said second message is System Information 13 of the GSM system.
6. A method of claim 5, wherein the second channel is available also to the
25 GPRS service, **characterized** in that said message System Information 13 is legible only to Iu mobile stations and Gb mobile stations.
7. A method of claim 5, wherein the second channel is not available to the GPRS service, **characterized** in that a description of the second channel in the message System Information 13 is legible only to Iu mobile stations.
- 30 8. A method of claim 4, **characterized** in that said Iu indicator field indicates, whether normal BCCH or extended BCCH is used to transfer the second message.

9. The method of claim 1, **characterized** in that said cell is barred against UMTS operation through Iu interface by indicating with said spare bit that UMTS service is not supported in said cell.

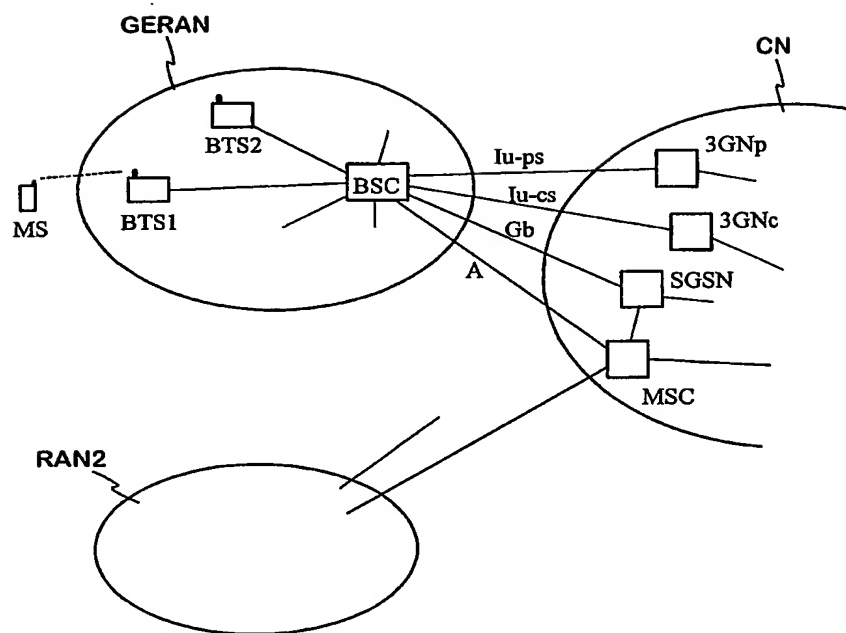


Fig. 1

SI3 rest octets
PRIOR ART

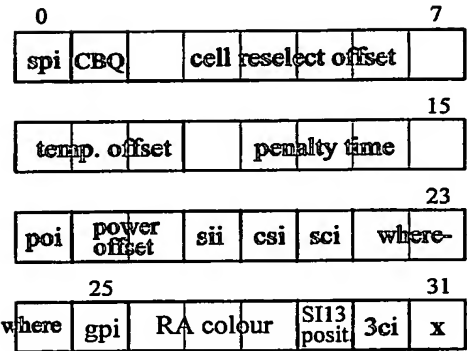


Fig. 2

- indicators (L/H) :
- spi = selection parameters -
 - poi = optional power offset -
 - sii = system information 2ter -
 - csi = early classmark sending control -
 - sci = scheduling if and where -
 - gpi = GPRS -
 - 3ci = 3G early classmark sending restriction -

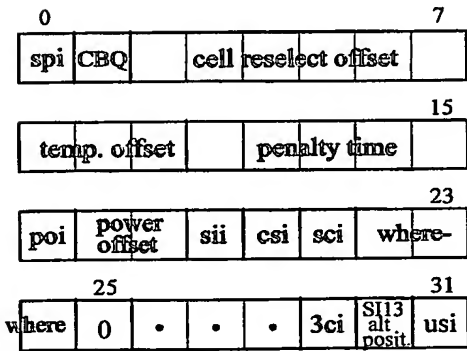


Fig. 3

usi = lu support indicator

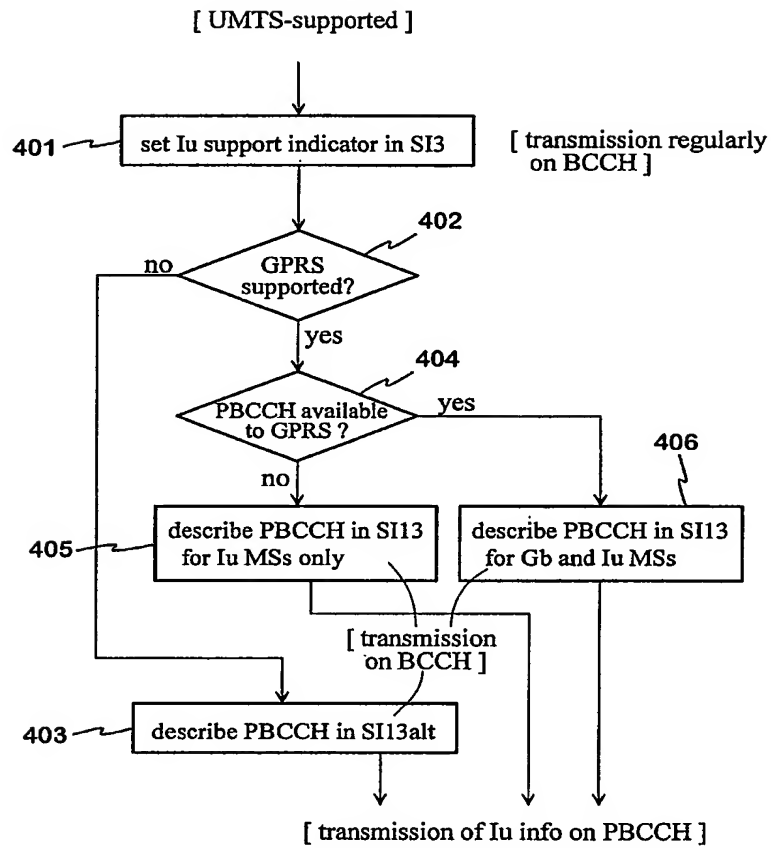


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00013

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38, H04Q 7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001036827 A1 (PETER HANS EDLUND ET AL), 1 November 2001 (01.11.01), see the whole document --	1-9
P,X	US 2002193139 A1 (GUNNAR MILDH ET AL), 19 December 2002 (19.12.02), see paragraph [0008] - [0011] --	1
A	WO 0062573 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 19 October 2000 (19.10.00), page 3, line 19 - page 4, line 5 --	1-9
P,A	US 2002111180 A1 (BILLY HOGAN ET AL), 15 August 2002 (15.08.02), abstract --	1-9

☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 April 2003

Date of mailing of the international search report

03-04-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Stefan Hansson/mj
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

30/12/02

International application No.

PCT/FI 03/00013

Patent document cited in search report				Publication date		Patent family member(s)		Publication date	
US	2001036827	A1	01/11/01	AU	4494801 A	15/10/01			
				WO	0176274 A	11/10/01			
US	2002193139	A1	19/12/02	WO	02080586 A	10/10/02			
WO	0062573	A1	19/10/00	AU	4442300 A	14/11/00			
				BR	0009745 A	08/01/02			
				CN	1356008 T	26/06/02			
				EP	1173994 A	23/01/02			
US	2002111180	A1	15/08/02	WO	02065805 A	22/08/02			
				WO	02065806 A	22/08/02			
				WO	02065807 A	22/08/02			
				WO	02065808 A	22/08/02			
				US	2002123348 A	05/09/02			
				US	2002151304 A	17/10/02			
				US	2003013443 A	16/01/03			
				WO	02065789 A	22/08/02			